
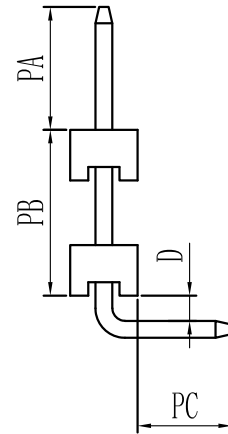
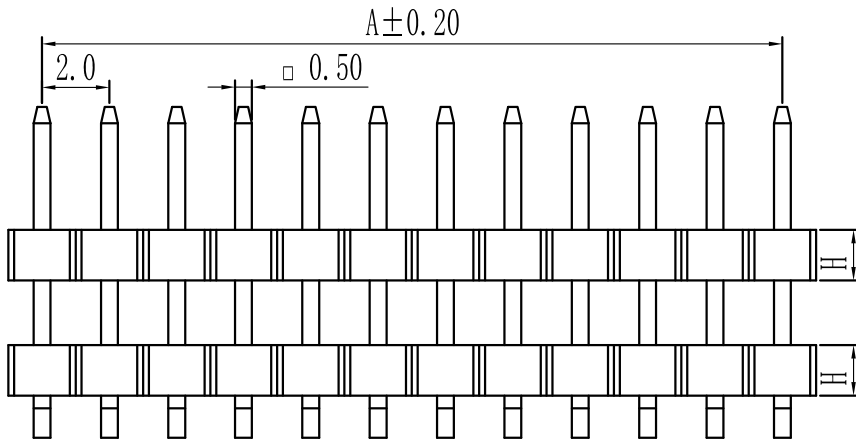
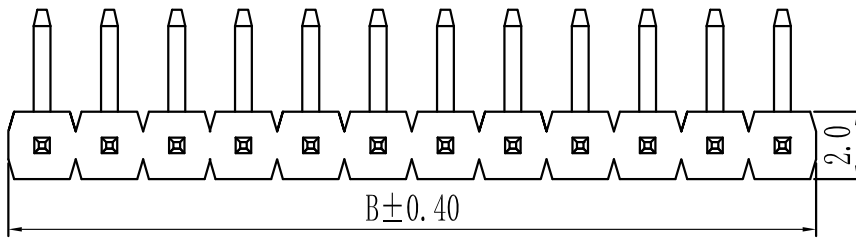



仅供参考

|      |                 |            |
|------|-----------------|------------|
| REV. | REVISION RECORD | DATE       |
| A0   | 新图面发行           | 2017.06.16 |

Specification:  
 Current Rating : 2AMP  
 Temperature Range : -40°Cto+105°C  
 Contact Resistance : 20mΩ Max  
 Insulation Resistance : 1000MΩ Min  
 Withstanding Voltage : AC 500V  
 Material:  
 Insulator : Polyester (UL94V-0)  
 Standard:PBT/PA6T/LCP  
 Contact: Brass  
 Plating : Au or Sn Over 50u" Ni

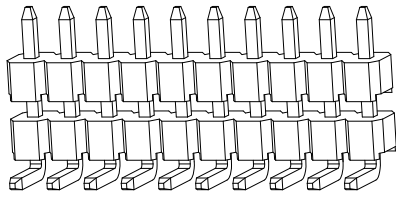

| Pin数 | 尺寸A   | 尺寸B   |
|------|-------|-------|
| 1x1  | -     | 2.0   |
| 1x2  | 2.0   | 4.0   |
| 1x3  | 4.0   | 6.0   |
| 1x4  | 6.0   | 8.0   |
| 1x5  | 8.0   | 10.0  |
| 1x6  | 10.0  | 12.0  |
| 1x7  | 12.0  | 14.0  |
| 1x8  | 14.0  | 16.0  |
| 1x9  | 16.0  | 18.0  |
| 1x10 | 18.0  | 20.0  |
| 1x11 | 20.0  | 22.0  |
| 1x12 | 22.0  | 24.0  |
| 1x13 | 24.0  | 26.0  |
| 1x14 | 26.0  | 28.0  |
| 1x15 | 28.0  | 30.0  |
| 1x16 | 30.0  | 32.0  |
| 1x17 | 32.0  | 34.0  |
| 1x18 | 34.0  | 36.0  |
| 1x19 | 36.0  | 38.0  |
| 1x20 | 38.0  | 40.0  |
| 1x21 | 40.0  | 42.0  |
| 1x22 | 42.0  | 44.0  |
| 1x23 | 44.0  | 46.0  |
| 1x24 | 46.0  | 48.0  |
| 1x25 | 48.0  | 50.0  |
| 1x26 | 50.0  | 52.0  |
| 1x27 | 52.0  | 54.0  |
| 1x28 | 54.0  | 56.0  |
| 1x29 | 56.0  | 58.0  |
| 1x30 | 58.0  | 60.0  |
| 1x31 | 60.0  | 62.0  |
| 1x32 | 62.0  | 64.0  |
| 1x33 | 64.0  | 66.0  |
| 1x34 | 66.0  | 68.0  |
| 1x35 | 68.0  | 70.0  |
| 1x36 | 70.0  | 72.0  |
| 1x37 | 72.0  | 74.0  |
| 1x38 | 74.0  | 76.0  |
| 1x39 | 76.0  | 78.0  |
| 1x40 | 78.0  | 80.0  |
| 1x41 | 80.0  | 82.0  |
| 1x42 | 82.0  | 84.0  |
| 1x43 | 84.0  | 86.0  |
| 1x44 | 86.0  | 88.0  |
| 1x45 | 88.0  | 90.0  |
| 1x46 | 90.0  | 92.0  |
| 1x47 | 92.0  | 94.0  |
| 1x48 | 94.0  | 96.0  |
| 1x49 | 96.0  | 98.0  |
| 1x50 | 98.0  | 100.0 |
| 1x51 | 100.0 | 102.0 |
| 1x52 | 102.0 | 104.0 |

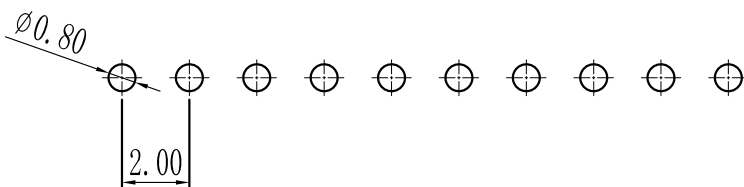

PCB LAYOUT

|          |                    |           |               |   |         |  |                             |
|----------|--------------------|-----------|---------------|---|---------|--|-----------------------------|
|          | GENERAL TOLERANCES |           | SCALE:<br>1:1 | NAME  | DATE    | 深圳市思拓展电子有限公司<br>SHENZHEN SINOTOP ELECTRONICS CO.,LTD<br>公司地址: www.szsituo.cn      公司电话: 0755-23765350<br>邮 箱: 2850175982@qq.com      公司传真: 0755-23765341 | PART. NO:<br>ST-PH-200-0051 |
|          | LINEAR             | ANGLES    |               |   |         |  | APPROVED                    |
| UNIT: MM | 0.00±0.20          | X° ±3°    | DESIGNER      | TITLE:<br>Pitch2.00mm Pin Header, Dual Plastic,<br>Single Row, Right Angle Type | REV: A0 | SHEET: 1/1   |                             |
| SIZE: A4 | 0.000±0.10         | X° X' ±2° | DRAWN<br>肖坤权  | 2017.06.16  |         |  |                             |